

Artikel Nr.: 341248

Wandaufbauleuchte, MADERA, Schwarz, 200-240V AC/50-60Hz, 9,00 W, Warmweiß



Technische Daten

Charakteristik

| | |
|------------------------|---------------------|
| Material | Aluminium / Holz |
| Farbe | Schwarz |
| Optik | |
| im Lieferumfang | Schrauben und Dübel |

Elektrische Daten

| | |
|--------------------------------|---------------------|
| Leistung | 9,00 W |
| Eingangsspannung | 200-240V AC/50-60Hz |
| Eingangsstrom | |
| Fassung / Sockel | |
| Anzahl Sockel | |
| Netzgerät | inkl. LED-Netzgerät |
| Ansteuerung | nicht dimmbar |
| Anschlussmöglichkeit | Klemme |
| Schutzklasse I, II, III | II |

Lichttechnische Eigenschaften

| | |
|-----------------------------|------------------|
| Leuchtmittel | Lichtquelle fest |
| Lichtfarbe | Warmweiß |
| Farbtemperatur | 3000 K |
| Lichtstrom | 560 lm |
| Abstrahlwinkel | 120° |
| LED Typ | SMD |
| LED Anzahl | 160 |
| Strahlungsverteilung | 606 nm |




Artikel Nr.: 341248

Wandaufbauleuchte, MADERA, Schwarz, 200-240V AC/50-60Hz, 9,00 W, Warmweiß

Lichtrichtung

| | |
|--------------------------|-------------|
| Dreh- und Schwenkbereich | feststehend |
| Neigungswinkel | |
| Abstrahlverhalten | |
| Reflektor / Linse | |

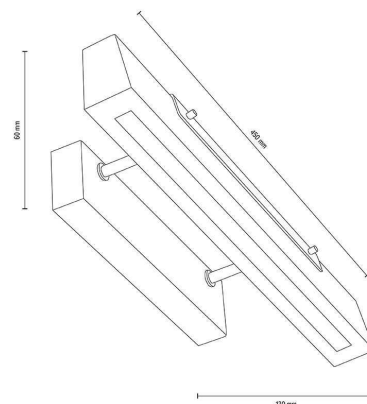

Abmessungen und Gewicht

| | |
|----------------------|--------|
| Länge (mm) | 450,00 |
| Breite (mm) | 60,00 |
| Höhe (mm) | 130,00 |
| Durchmesser (mm) | 0,00 |
| Deckenabhängung (mm) | 0,00 |
| Gewicht | 1460 g |

Sockelmaß

| | |
|------------------|--------|
| Länge (mm) | 250,00 |
| Breite (mm) | 60,00 |
| Höhe (mm) | 30,00 |
| Durchmesser (mm) | 0,00 |

Artikel Nr.: 341248

Wandaufbauleuchte, MADERA, Schwarz, 200-240V AC/50-60Hz, 9,00 W, Warmweiß

Grenzwerte

| | |
|--------------------|---------------|
| Betriebstemperatur | -25°C - +45°C |
| Lagertemperatur | -25°C - +60°C |
| IP - Schutzart | IP20 |


Allgemeine Eigenschaften

Umwelteigenschaften

| | |
|------------------------|-------------|
| Energieeffizienzklasse | F |
| Energieverbrauch | 9 kWh/1000h |

Lebensdauer

| | |
|-----------------------------|---------|
| Lebensdauer | 30000 h |
| Lichtstrom Ende Lebensdauer | 0,70 |
| Schaltzyklen | 15000 |

| | |
|---|---|
| EEI | Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F |
| IP20 | Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser. |
|  | Leuchte der Schutzklasse II bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern zusätzliche Sicherheitsvorkehrungen wie zusätzliche oder verstärkte Isolierung vorgesehen sind. Es sind weder Vorkehrungen für den Anschluss eines Schutzleiters vorhanden, noch beruht der Schutz auf den Einrichtungsbedingungen. |

Article no.: 341248

Surface mounted wall lamp, MADERA, black, 200-240V AC/50-60Hz, 9,00 W, warmwhite

**Technical Data****General Characteristics**

| | |
|-----------------------------|-------------------|
| Material | aluminum / wood |
| Colour | black |
| Optics | |
| included in delivery | screws and dowels |

Electrical Characteristics

| | |
|------------------------------------|-----------------------------|
| Power | 9,00 W |
| Input voltage | 200-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | |
| Number of bases | |
| Power supply unit | incl. LED-power supply unit |
| Electronically reversible | not dimmable |
| Connection possibility | clamp |
| Protection class I, II, III | II |

Light Technical Data

| | |
|------------------------------------|------------------|
| Bulb | Lichtquelle fest |
| Colour Designation | warmwhite |
| Colour temperature | 3000 K |
| Luminous flux | 560 lm |
| Beam angle | 120° |
| LED type | SMD |
| LED quantity | 160 |
| Spectral power distribution | 606 nm |




Article no.: 341248

Surface mounted wall lamp, MADERA, black, 200-240V AC/50-60Hz, 9,00 W, warmwhite

Light Direction

| | |
|-----------------------------------|-------|
| Rotating and tilting range | fixed |
| Angle of inclination | |
| Radiation direction | |
| Reflector / lense | |

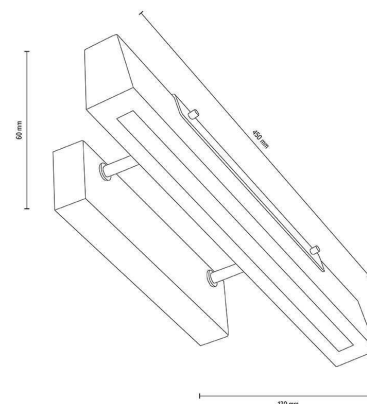
Dimensions & Weight

| | |
|--------------------------------------|--------|
| Length (mm) | 450,00 |
| Width (mm) | 60,00 |
| Height (mm) | 130,00 |
| Diameter (mm) | 0,00 |
| Suspensions from ceiling (mm) | 0,00 |
| Product Weight | 1460 g |

Base dimensions

| | |
|----------------------|--------|
| Length (mm) | 250,00 |
| Width (mm) | 60,00 |
| Height (mm) | 30,00 |
| Diameter (mm) | 0,00 |

Article no.: 341248

Surface mounted wall lamp, MADERA, black, 200-240V AC/50-60Hz, 9,00 W, warmwhite

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -25°C - +45°C |
| Storage temperature | -25°C - +60°C |
| IP - Code | IP20 |

General product data

Environmental Characteristics

| | |
|--------------------|-------------|
| Energy label | F |
| Energy consumption | 9 kWh/1000h |

Lifespan

| | |
|---------------------------------|---------|
| Lamp life time | 30000 h |
| Luminous flux (end of lifetime) | 0,70 |
| Number of switching cycles | 15000 |

EEI This product contains a light source of energy efficiency class F

IP20 Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class II in which the protection against electric shock is not based solely on the insulation, but additional safety precautions such as additional or reinforced insulation are provided. There are no provisions for the connection of an equipment grounding conductor exists, yet underlying the protection of the facility conditions.